

Resin Bound Permeable Surfacing

Recommended Specification for Terrabase Rustic

Permeable Driveway (SUDS)

Typical Base Build Up

Surface Course

Hand applied and trowelled to a rustic finish by Addagrip approved installers.


Terrabase Addagrip

Terrabase Geofabric

Sub-base

laid by others in well compacted layers to a minimum fall of 1.5%

Sub-grade

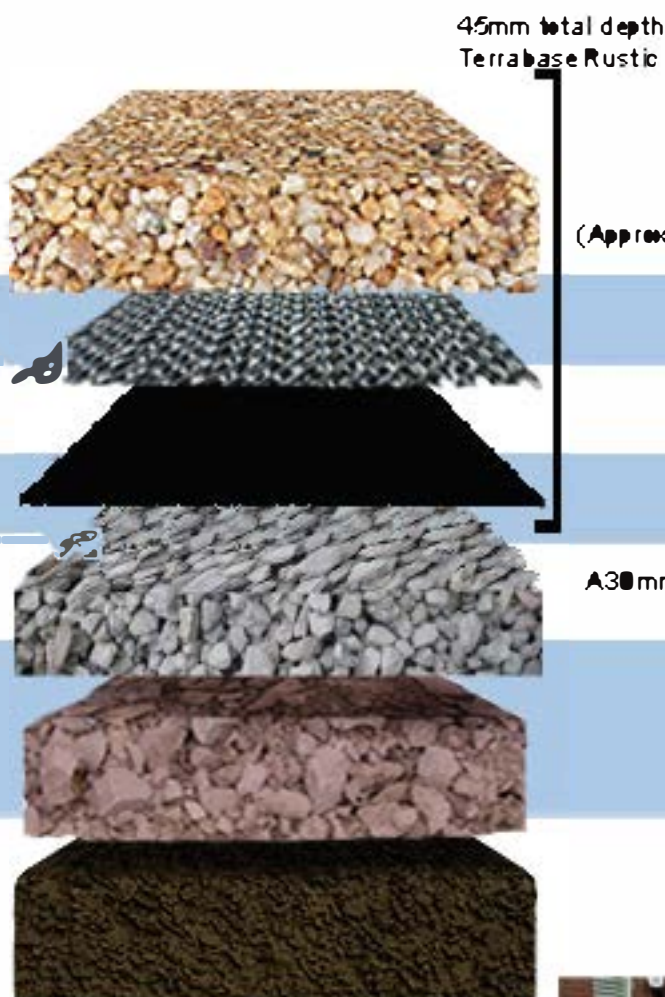

Typical depth of Terrabase Rustic resin bound paving surface.

40mm layer of 6-10 mm aggregate (Approx 5mm is incorporated into the Addagrip)

Laid by Addagrip approved installers
Depth of Terrabase Addagrip 7.1mm

Laid by Addagrip approved installers
Depth of Terrabase Geofabric 2.4mm

A 30mm Limestone layer of 6-10mm aggregate laid by others in well compacted layers

A 150mm - 225mm layer of Type 3 granular sub-base

NOTE: A suitable steel, wood, brick, stone or aluminium edgings should be provided to ensure a neat edge detail but depending on project requirements the Geofabric can be used as an edging. The maximum tolerance of the base should not exceed 3mm under a 1m straight edge. If existing sub-grade is silty, it may be necessary to stabilise it or partially replace it with sub-base/granular capping layer. If there is danger of ponding, the sub-base should be laid to falls. Total sub-base depth will be dictated by loading and attenuation requirements.

Any advice, recommendation or information given by Addagrip Terrace Ltd is based on practical experience and is believed to be accurate at the time of publication, no liability or responsibility of any kind (including liability for negligence) is accepted in this respect by the company, its Servants, or Agents.

