

Heavy Duty Road

Typical base build up suitable for heavy vehicle use

Recommended Specification for Addastone PLUS Resin Bonded Surfacing

Surface Course

Hand applied

Binder Course

Laid by others in well compacted layers to minimum fall of 1:40 to 1:60. Vacuum Assisted Captive Shot Blasting to remove dirt and residue from the surface to ensure a good key.


Base Course

Laid by others

Sub-base Course

Laid by others

Sub-grade

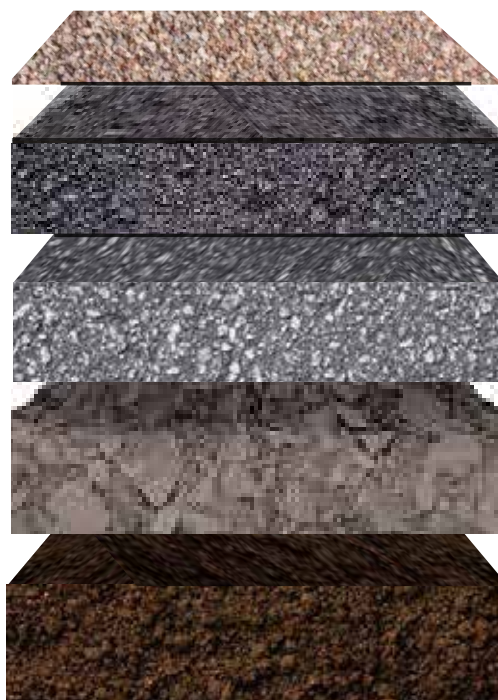

Addastone PLUS Resin Bonded - Typical depth 5-7mm depending on aggregate size

A 30-40mm AC6 Dense Surf 100/150 or AC10 Dense Surf 100/150 (+/- 6mm)

100-200 mm AC32 Dense base/Bin 100/150

Sub-base: Should be 100-150mm (minimum 100mm) or as specified for the site conditions by a qualified engineer

Any advice, recommendation or information given by Addagrip Terraco Ltd is based on practical experience and is believed to be accurate at the time of publication.

No liability or responsibility of any kind (including liability for negligence) is accepted in this respect by the company, its Servants or Agents.

